

ELEVATOR LAYOUT

발주처 : 한국수력원자력(주)

현장명 : 의암발전소


기 종 : 승객용/15인승/6층/60mpm

수 량 : 1대

시공사 : 신광엘리베이터(주)



SPECIFICATION		
용도	승객용	
대수	#03 호기 1대	
용량	1000KG	15인승
속도	60 M/MIN	
제어방식	VVVF 방식	
조작방식	SELECTIVE COLLECTIVE	
DOOR 방식	CENTER OPENING(CO)	
출입구	출입구수 6개소 정지층수 6개층	
정지층명	B4,B3,B2,B1,1,2'FL	
출입구 크기	W 900 x H 2100	
카 크기	AA 1400 x BB 1700	
승강로 크기	X 1900 x Y 2000	
권선기	HS - 208B	
모타	15KW 4P	
RAIL	CAR : 18KG/M CWT : 8KG/M	
ROPE	φ 12 x 5본	
TRAVEL	25,125MM	
TOTAL HEIGHT	32,245MM	
POWER	동력전원 : 440V 60HZ 3PHASE	
	조명전원 : 220V 60HZ 1PHASE	

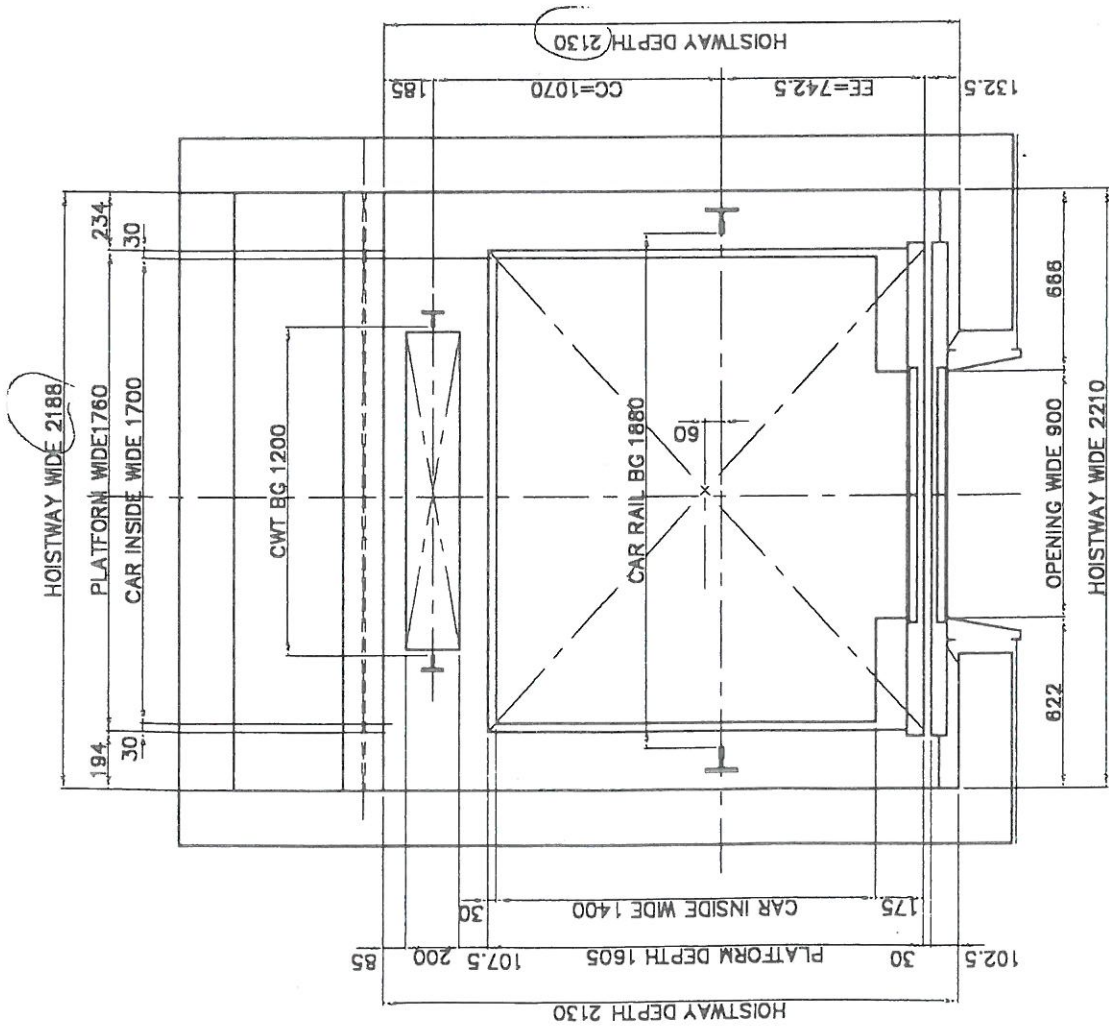

현장명: 의암 발전소



CHANGES

MAT. SPEC
기 준

Tolerances unless otherwise stated
공차 ±0.5

PROJECTION 투영법	FIRST 제1각도	THIRD 제3각도	mm 단위
TOL ± 차오공차			

3000KG SUSPENSION HOOK

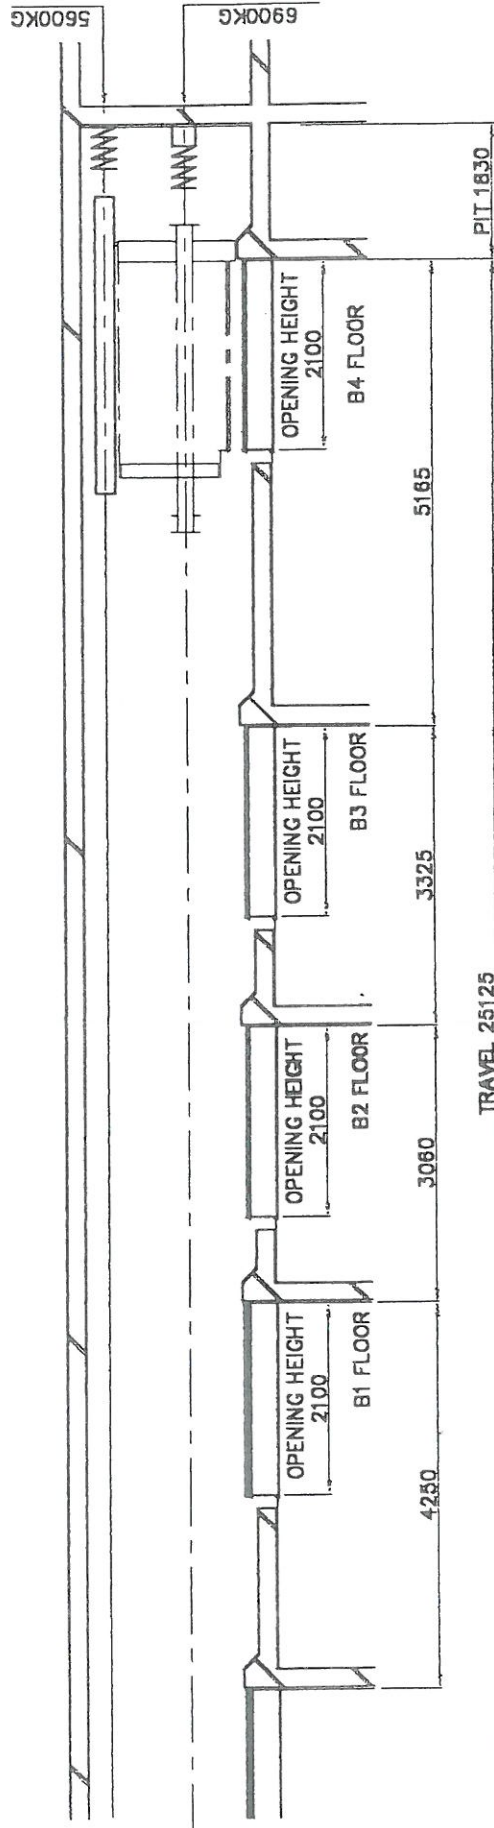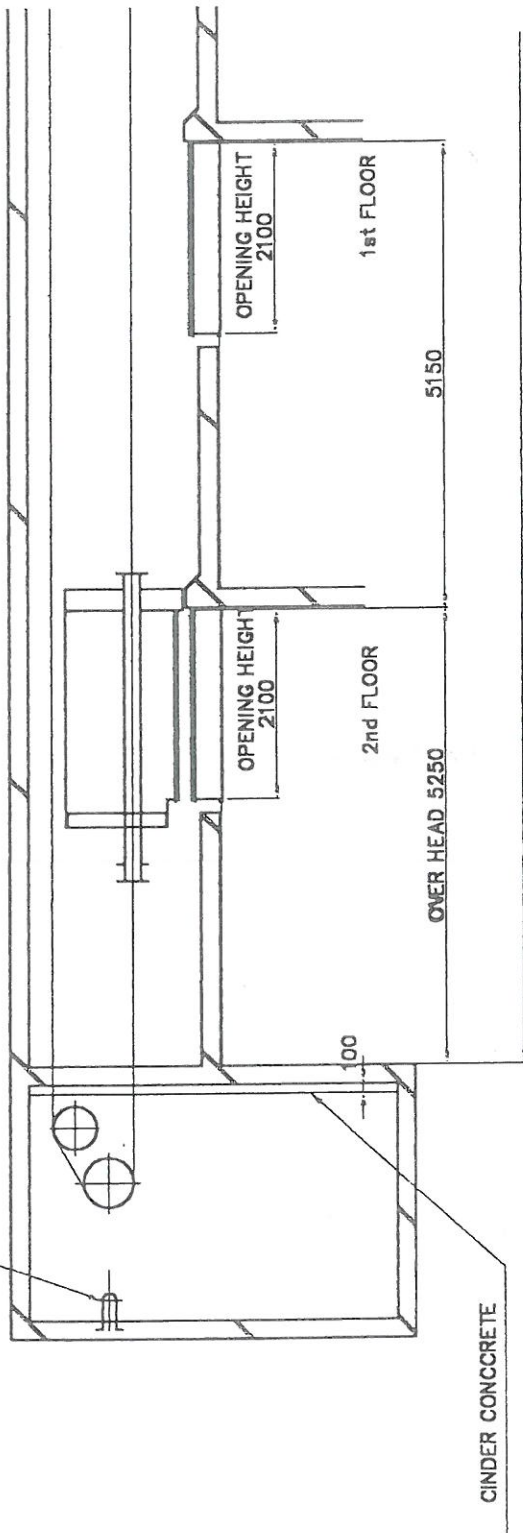

TOTAL HEIGHT 32245

CHANGES

MAT. SPEC

Tolerances unless otherwise stated
공차 ±0.5

PROJECTION ANGLE 투영각	FIRST 투영면	THIRD 투영면	mm 단위
TOL ± 각도공차			

MACHINE ROOM DEPTH 5660

HOISTWAY DEPTH 2130

545


MACHINE ROOM EXIT
(W900xH2100)

POWER RECEIVING BOX

CONTROL PANEL

DUCT HOLE

MACHINE ROOM EXIT
(W900xH2100)

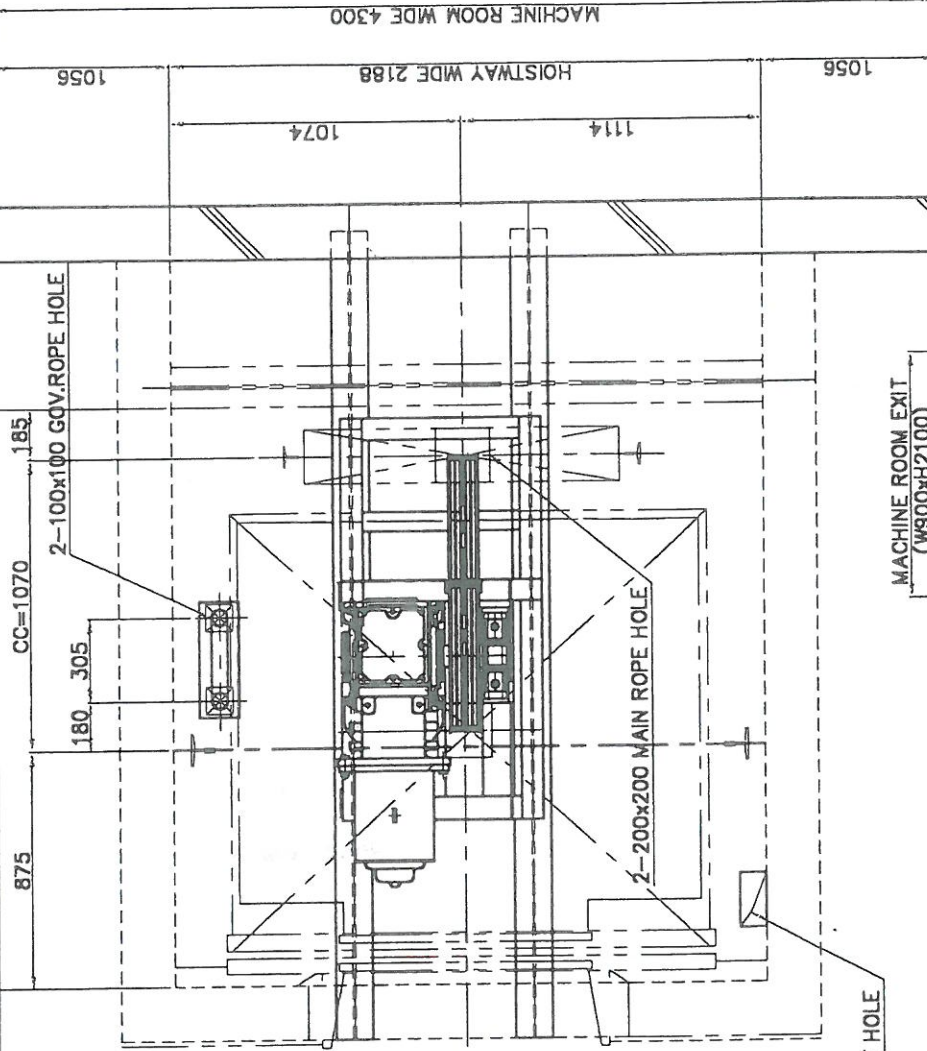

CHANGES

MAT. SPEC
材 質


Tolerances unless otherwise stated
公差 土0.5

PROJECTION
ANGLE
투영법

FIRST
THIRD

TOL ±
각도공차

mm
inch

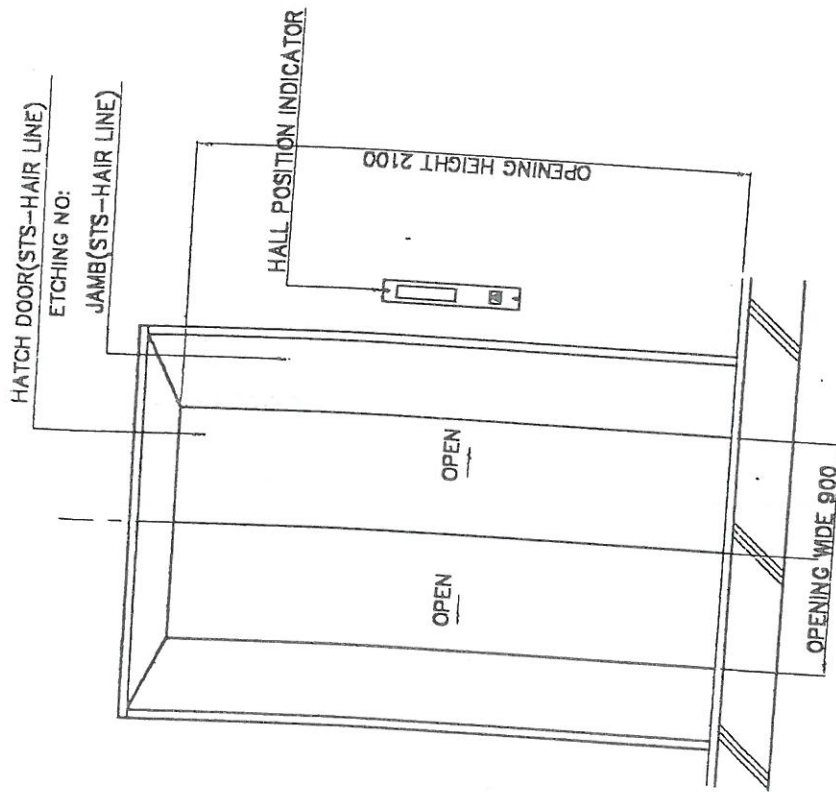

CHANGES

MAT. SPEC 재질		TOLERANCES UNLESS OTHERWISE STATED 공차 ±0.5		PROJECTION 투영법		FIRST 첫번째		THIRD 셋번째		DIM 단위	